



Samsung DV300F Front and Rear Casing Replacement

This guide will serve as replacement guide for the Front and Rear Casing.

Written By: Timothy Gordon



INTRODUCTION

This guide will show you how to remove the casing around the device so that it and the parts underneath it can be replaced.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Front and Rear Casing




- Remove the two black Phillips 4.2mm on the right side of the camera by using a #0 screw
- Remove the two black Phillips 4.2mm on the left side of the camera by using a #0 screw
- Remove the black Phillips 4.2mm on the bottom of the camera by using a #0 screw

Step 2



- Take off the back case of the camera gently

Step 3

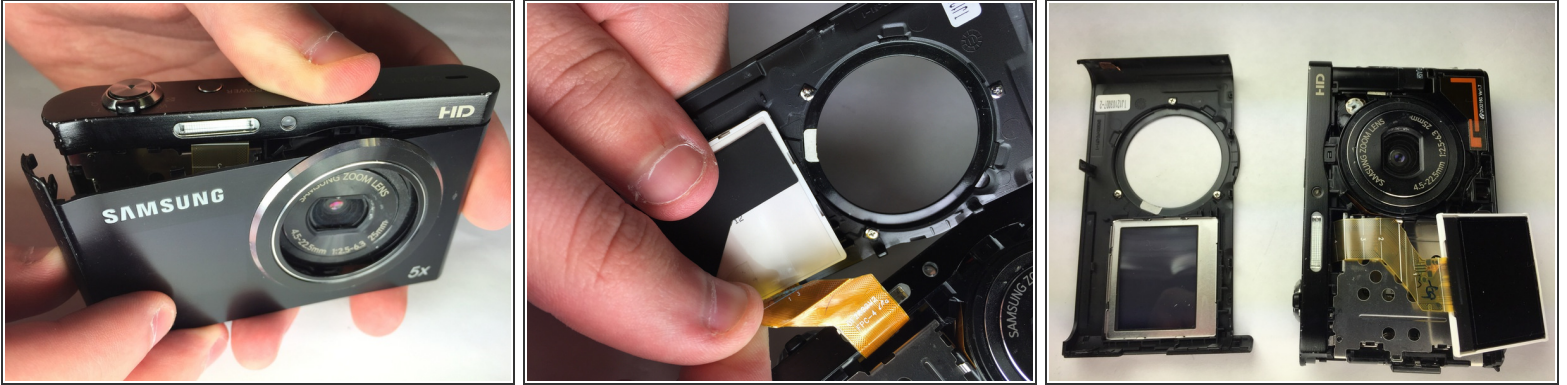

- Take off the front case of the camera gently
- Take off the front LCD gently, so the front casing is completely free

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-09-24 04:41:57 PM.